



RADIO REMOTE CONTROL B6-8 DISPLAY

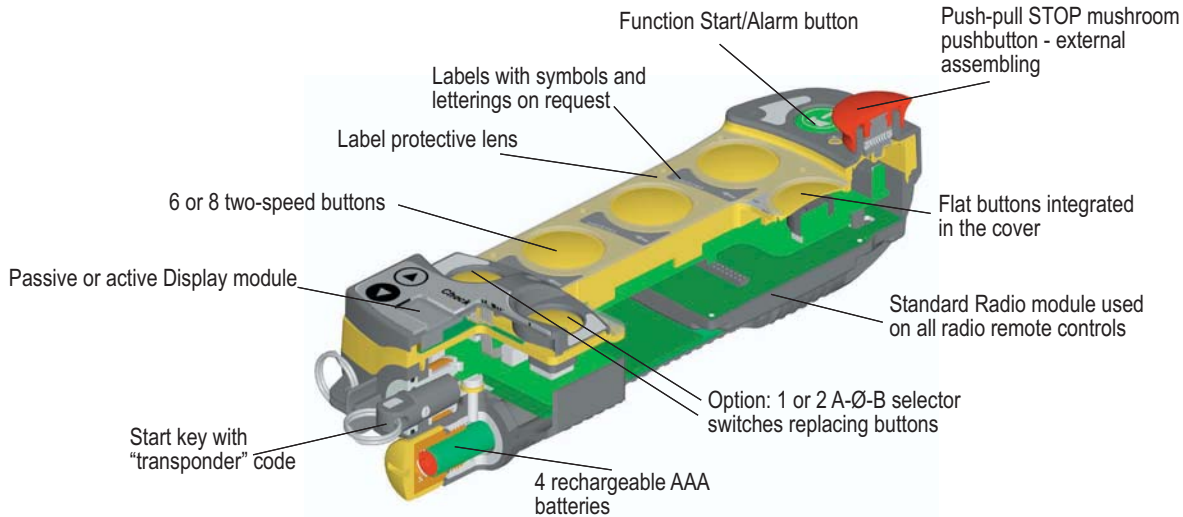

Technical specifications

Operational temperature	-25°C / +70°C
Degree of protection	IP 65
Weight	420 g
Range	200 m max.
Battery life	40 h
Safety category	3 (EN 954-1) 4 (EN 954-1 stop function)
Markings and conformity	CE 98/37/CE, 2004/108/CE, 1999/5/CE, 2006/95/CE

Overall dimensions

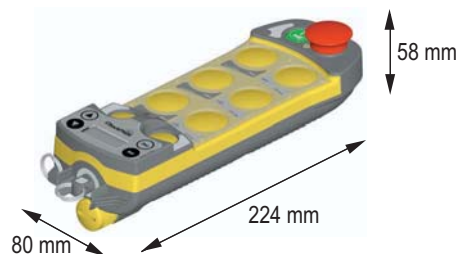

Product features

- Programming via radio interface (optional).
- B4-12 Interface programming software (for Windows 98/ME/2K/XP and Pocket PC) (under evaluation).
- Two-way transmission with automatic selection of the best channel.
- Passive or active Display module for visualising or questioning the data coming from the Actuating Unit or Module E.

The data and the products illustrated in this brochure may be modified without notice. Under no circumstances can their description have a contractual value.