

CODEUR INCREMENTAL INCREMENTAL ENCODER INKREMENTALE DREHGEBER

AK4



BREVET 1720572

Accouplement intégré

Robustesse

Encombrement réduit

Applications:
presse, cisailles, moteur CC...

PATENT 1720572

Built-in coupling

Robustness

Reduced overall dimensions

Applications:
presses, shears,
DC motors...

PATENT 1720572

Robuster Drehgeber
mit integrierter Kupplung

Kompakte Bauweise


Anwendung:
Pressen, Schlagscheren,
Gleichstrommotoren

CARACTERISTIQUES SPECIFICATIONS KENNDATEN


DIMENSIONS DIMENSIONS ABMESSUNGEN

• CAPOT COVER DECKEL	Aluminium Aluminium Aluminium	• VITESSE DE ROTATION MAX. SPEED MAX. DREHZAHL	12 000 min ⁻¹ 12 000 min ⁻¹ 12 000 min ⁻¹
• EMBASE BODY GEHÄUSE	Aluminium Aluminium Aluminium	• CHARGE RADIALE MAX. RADIAL SHAFT LOADING MAX. WELLENBEL. RADIAL .	20 N 20 N 20 N
• AXE SHAFT WELLE	Inox Stainless steel Edelstahl	• CHARGE AXIALE MAX. AXIAL SHAFT LOADING MAX. WELLENBEL. AXIAL	20 N 20 N 20 N
• COUPLE TORQUE DREHMOMENT	0,2 Ncm 0.2 Ncm 0.2 Ncm	• MOMENT D'INERTIE INERTIA TRÄGHEITSMOMENT	15 gcm ² 15 gcm ² 15 gcm ²
• POIDS WEIGHT GEWICHT	100 g 100 g 100 g	• ETANCHEITE PROTECTION SCHUTZART	IP 64 IP 64 IP 64

3A

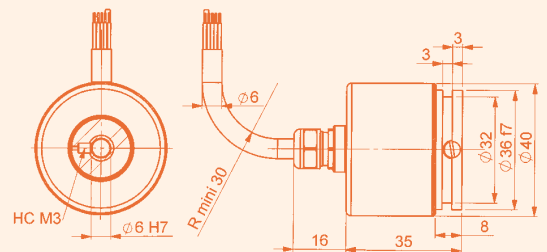

3R

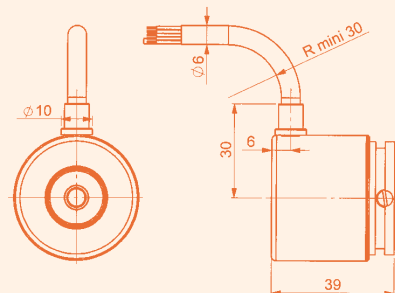

ACCESSOIRES - ACCESSORIES - ZUBEHÖR
P. 33

REFERENCES DE COMMANDE ORDERING CODE BESTELLBEZEICHNUNG

Ex. de commande / Ordering example / Bestellbeispiel : **AK4 06 2 9 3R / 1024**



AK4



Axe Ø
Shaft Ø
Wellen Ø

06 = 6 mm



Etages de sortie
Output circuit
Ausgangsstufen

2 = 5 V RS422
5 = 11-30 V Driver
9 = 5-24 V Driver



Signaux de sortie
Output signals
Signal Ausgang

9= A, \bar{A} , B, \bar{B} , 0, $\bar{0}$
7= A, \bar{A} , B, \bar{B}
5= A, \bar{A}
A= top 0 sur A
Index gated on A
Nullimpuls verknüpft mit A
N= top 0 non-calibré
Index ungated
Nullimpuls unverknüpft



Connectique
Connection
Anschluss

3A, 3R



Impulsions/tr
Pulses/revolution
Schritte/Umdr.

1024

2000 max

nous consulter/
contact us/
Rufen Sie uns an



Meyer Industrie-Electronic GmbH - MEYLE

Carl-Bosch-Straße 8 Tel.: (+49) 05481-9385-0 Internet: www.meyle.de
49525 Lengerich/Germany Fax: (+49) 05481-9385-12 E-Mail: sales@meyle.de